



TWO HOLE 'S' COVER STANDARD
NO VENT HOLES IN WATERTIGHT
COVERS

WATERPROOF/BOLT-DOWN COVER
REQUIRED IN ALL EASEMENT AND
OFF STREET AREAS.

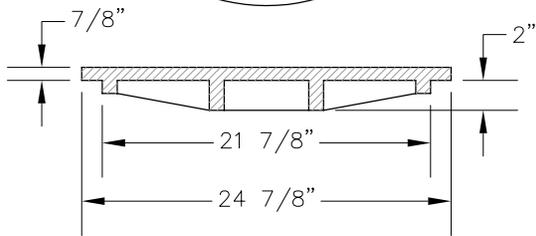

COVER (150 LBS)


(OLYMPIC FOUNDRY MH26S, OR APPROVED EQUAL)

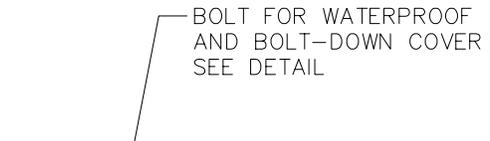

BOLT FOR WATERPROOF
AND BOLT-DOWN COVER
SEE DETAIL

DEPRESSED HANDLE

(OLYMPIC FOUNDRY MH26WT, OR APPROVED EQUAL)

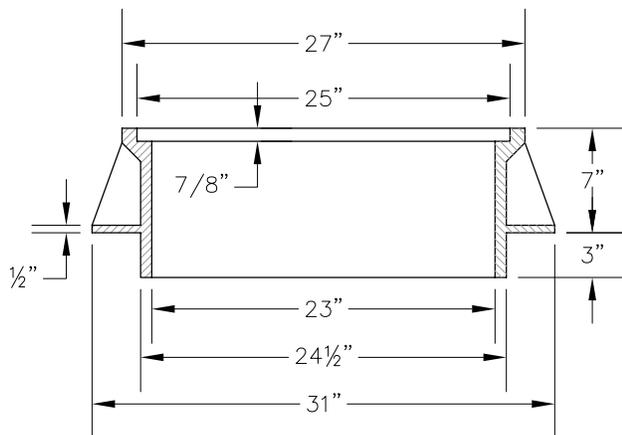


FRAME (237 LBS)

(OLYMPIC FOUNDRY MH26A, OR APPROVED EQUAL)

1/2" - 13 NC X 1 1/2" HEX
HEAD STAINLESS STEEL
CAP SCREW, 3 REQ'D.

1 1/4" OD STAINLESS STEEL
WASHER, 3/32" THICK
3 REQ'D

FLAT RUBBER WASHER
3 REQ'D

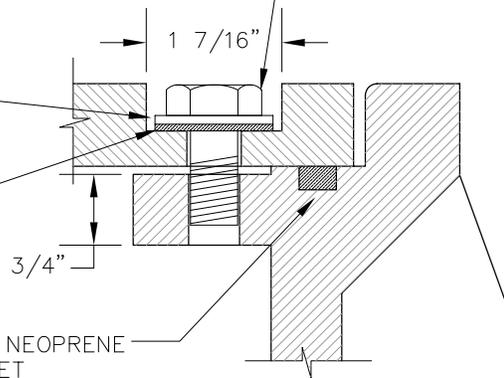

3/8" NEOPRENE
GASKET

NOTE:
TAMPER PROOF FRAME AND COVER
REQUIRED OUTSIDE OF RIGHT OF
WAY OR IN UNDEVELOPED AREAS.



City of Amity
109 Maddox Street
Amity, Oregon 97101
503.835.3711

**MANHOLE COVER AND
FRAME DETAILS**

DETAIL NO.

S-250

12/5/03