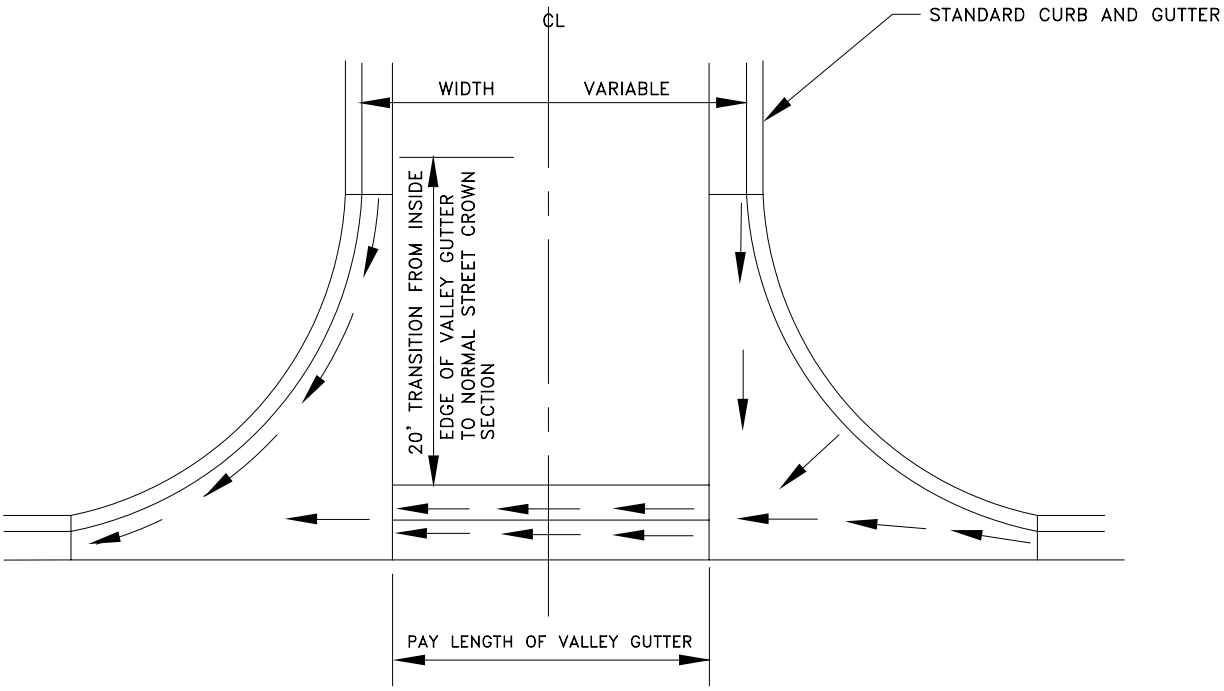

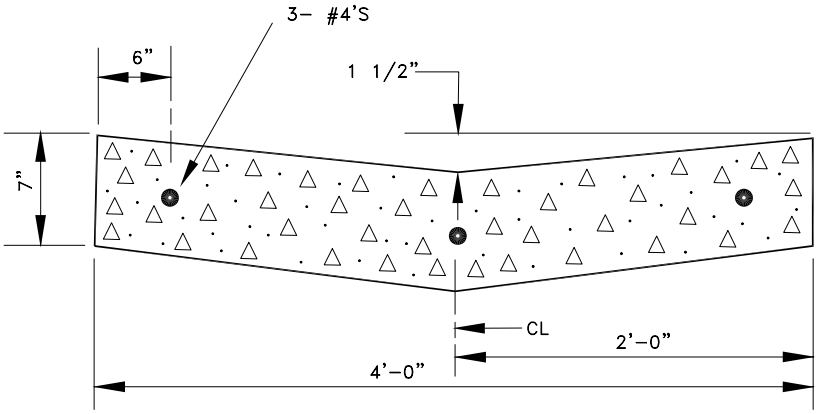

NOTES

1. CONCRETE SHALL HAVE A MINIMUM BREAKING STRENGTH OF 3300 PSI AFTER 28 DAYS 6 SACK MIX.
2. VALLEY GUTTER MAY BE USED IN CENTER OF ALLEY OR OTHER MINOR STREET IF APPROVED BY ENGINEER

City of Amity
109 Maddox Street
Amity, Oregon 97101
503.835.3711

VALLEY GUTTER DETAIL

DETAIL NO.
T-302
1/19/04